


TIMOTEX

LEADERS IN MOBILE WEIGHING



Pallet truck scale

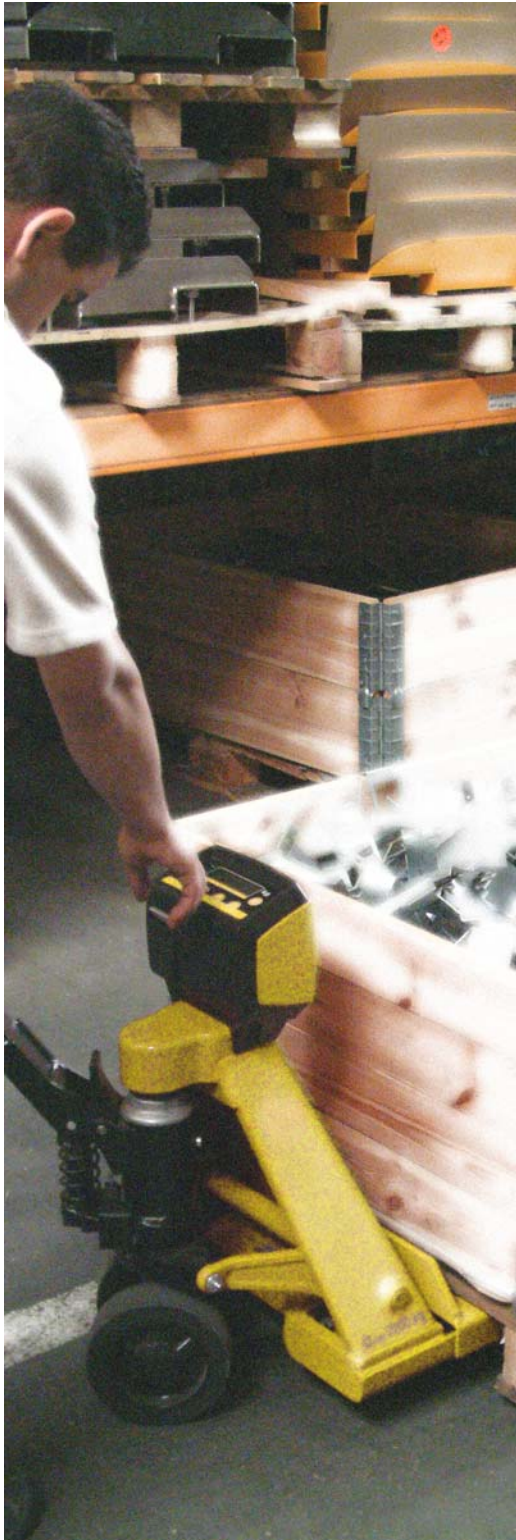

Weighing hand pallet truck X-tra L **X-TRA**line

specifications

The X-tra L combines the controlling function of a very accurate weighing system with the mobility and the flexible availability of a hand pallet truck. With the Timotex X-tra L you weigh pallets and containers during transport, at the place of handling. You save time when checking incoming and outgoing goods and during dosing and filling processes. The X-tra L is developed for industrial applications and is protected against water, dust and shocks. The exchangeable battery module provides use for 35 hours.

Functions

- ◆ Automatic and manual zero correction
- ◆ Gross/net weighing
- ◆ Automatic and manual tare
- ◆ Cumulative totaling, with sequence number
- ◆ Code entry (6 digits)
- ◆ Piece counting by sampling
- ◆ Piece counting by entry of piece weight
- ◆ Output RS 232
- ◆ Internal clock
- ◆ Error messages in display
- ◆ Automatic switch off after 30 minutes of non-use
- ◆ kg / lb toggle



Specifications

Capacity: 2000 kg

Graduation multi-range:

0 - 200 kg: graduation 0.2 kg

200 - 500 kg: graduation 0.5 kg

500 - 2000 kg: graduation 1.0 kg

Maximum inaccuracy:

0.1% of the applied weight

Protection class:

Load cells and cabling IP67

Indicator IP65

Battery life: 35 hours with voltage level indication

Battery: 12 Vdc / 1.2 Ah, exchangeable

Charger: 230 Volt / 12 Vdc - 300 mA

Approved version: Memory for last 10 entered tare values, codes and piece weights. No kg / lb toggle and no piece counting by sampling.

Options

- ◆ Built-in printer for printing weight data on site
- ◆ Legal for trade version (OIML III)
- ◆ Relay output to activate shut-off valve or visual/audio signals
- ◆ Explosion proof version (ATEX)
- ◆ Rotating indicator for reading display from all angles
- ◆ Extra battery module for continuous use
- ◆ Stainless steel version
- ◆ Stainless steel forks
- ◆ Steering wheels in polyurethane or nylon
- ◆ Loading wheels in nylon and/or tandem
- ◆ Footbrake
- ◆ Fork length from 950 mm to 2000 mm
- ◆ Width over forks 690 mm
- ◆ Other options on demand

For special options the specifications may differ from the standard specifications.

DIMENSIONS in mm

A Fork length	: 1150
B Fork width	: 170
C Minimum fork height	: 90
D Maximum fork height	: 210
Lifting height	: 120
E Width over forks	: 550
F Height to top indicator	: 650

FEATURES

Colour	: yellow RAL 1028, epoxy painted
Weight	: 110 kg
Steering wheels	: rubber
Loading wheels	: polyurethane, single

